



**PVC BELTING - Elevator & Conveyor**

This heavy-duty interwoven-constructed belt offers excellent service in bucket elevators, grain, feed, seed, fertilizer & applications requiring a low stretch & good tear resistance all polyester carcass and PVC cover compounds that are moderately oil resistant. The belt construction meets and exceeds safety standards established by OSHA for static conductivity and MSHA for flame resistant properties. All belts USA made.


**Product Construction:** Solid woven polyester carcass with black PVC top and bottom covers.  
**Special Standards:** Fire resistant to MSHA 2G/ASTM D378. Static conductive to OSHA 29 CFR.  
**Top / Bottom Cover:** Smooth PVC, Black

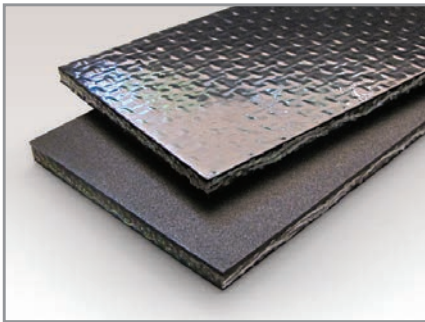


**PVC 200** Black PVC Cover x Cover

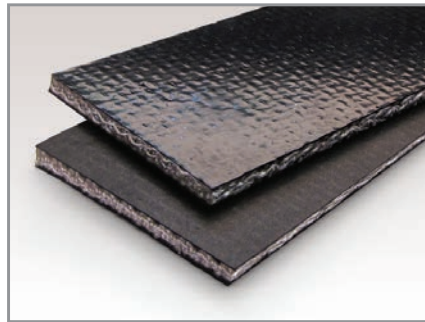


**PVC 250** Black PVC Cover x Cover

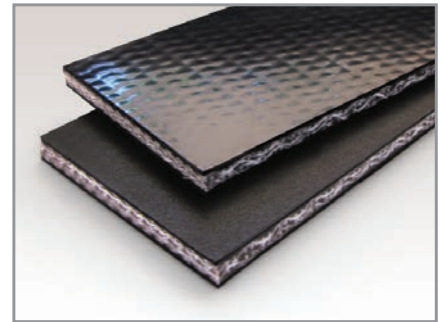


**PVC 350** Black PVC Cover x Cover

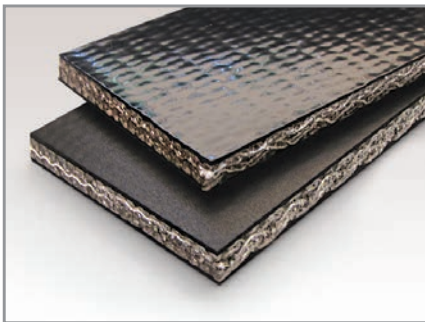

**PVC 450** Black PVC Cover x Cover

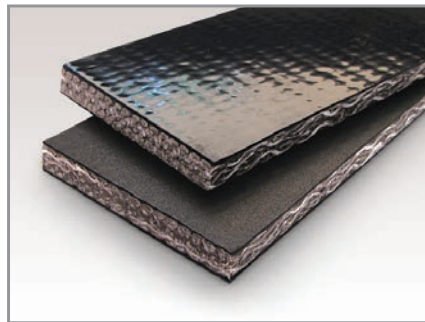

**PVC 600** Black PVC Cover x Cover

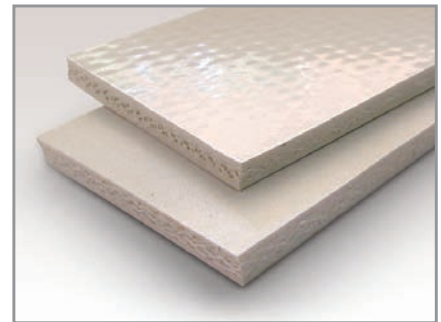

**PVC 200, 350, 450** White PVC Cover x Cover  
Also available in FDA White

**PVC BELTING**

STYLE	Rated Working Tension, lbs / in.	Rated Working Tension, N/ mm	Nominal Overall Gauge, in.	Nominal Overall Gauge, mm	Nominal Weight, lbs. sq/ft	Nominal Weight, #PIW	Nominal Weight, kg/ sq.m	Minimum Pulley, in.	Minimum Pulley, mm	Maximum Bucket Proj., in.*	Maximum Bucket Proj., mm*	Temp. Range F°	Temp. Range C°
PVC 200	200	35	.240	6.1	1.60	.133	7.8	4	102	5	127	0° to 180°	-18° to 82°
PVC 250	250	44	.260	6.6	1.75	.146	8.5	6	152	6	152	0° to 180°	-18° to 82°
PVC 350	350	61	.300	7.6	2.00	.167	9.8	8	203	8	203	0° to 180°	-18° to 82°
PVC 450	450	79	.360	9.1	2.40	.200	11.7	10	254	9	229	0° to 180°	-18° to 82°
PVC 600	600	105	.375	9.5	2.50	.208	12.0	12	304	11	279	0° to 180°	-18° to 82°

\* Maximum Bucket Projections based on Agricultural Applications. Lower temperature options available upon request.

Don't see a belt you need? Call KC Supply for information on heavier belts and more!