


# SEVERE DUTY URETHANE ELEVATOR BUCKETS

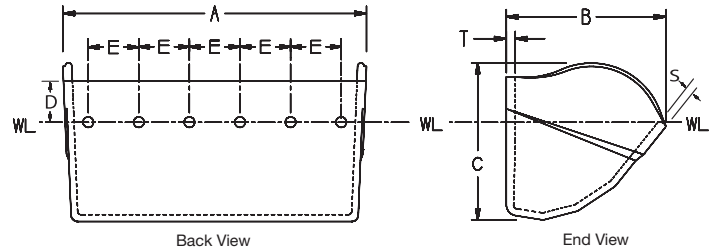

## STYLE CC-XD "SUPER CAPACITY" BUCKETS

SIZE Inches (Millimeters) (Nominal)	Dimension-Actual (Inches) Tolerance A, B, C ± 1/8" T ± 1/64"					Drilling-Standard (Inches) ② Tolerance D ± 1/4"				Capacity ① Tolerance ± 3%				Spacing on Belt Inches (Minimum)	Weight (Pounds)		
	Length A	Proj. B	Depth C	Thick-ness T	Thick-ness S	From Top D	Center to Center E	No. of Holes	Bolt Dia.	WL		WL + 10%			Each (Average)	Per Carton (Average)	Number Per Carton
										Cu. In.	Cu. Ft.	Cu. In.	Cu. Ft.				
<b>11 X 7</b> 280-180	11-11/16	7-15/16	7-7/8	3/8	1/2	2	3-3/8	4	5/16	264.1	.1528	293.4	.1698	8	4.63	41.0	8
<b>12 X 7</b> 300-180	12-11/16	7-15/16	7-7/8	3/8	1/2	2	3-3/8	4	5/16	288.9	.1672	317.8	.1839	8	4.95	44.0	8
<b>13 X 7</b> 330-180	13-11/16	7-15/16	7-7/8	3/8	1/2	2	3-5/8	4	5/16	314.1	.1818	345.5	.1999	8	5.24	46.0	8
<b>14 X 7</b> 350-180	14-11/16	7-15/16	7-7/8	3/8	1/2	2	3	5	5/16	339.5	.1967	373.4	.2160	8	5.46	48.0	8
<b>15 X 7</b> 370-180	15-11/16	7-15/16	7-7/8	3/8	1/2	2	3-1/4	5	5/16	364.7	.2111	401.2	.2321	8	5.78	51	8
<b>16 X 7</b> 400-180	16-11/16	7-15/16	7-7/8	3/8	1/2	2	2-7/8	6	5/16	389.9	.2256	428.9	.2482	8	6.09	53.0	8
<b>12 X 8</b> 300-215	12-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	3-3/8	4	5/16	376.5	.2179	414.2	.2397	9	6.51	56.0	8
<b>14 X 8</b> 350-215	14-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	3	5	5/16	446.8	.2586	491.5	.2844	9	7.00	60.0	8
<b>16 X 8</b> 400-215	16-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	2-7/8	6	5/16	531.5	.3076	584.7	.3383	9	7.72	66.0	8
<b>18 X 8</b> 450-215	18-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	3-1/8	6	5/16	587.0	.3397	645.7	.3737	9	8.41	71.0	8
<b>20 X 8</b> 500-215	20-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	3-1/2	6	5/16	670.0	.3877	737.0	.4265	9	9.56	83.0	8
<b>20 X 10</b> 500-260	20-11/16	11-5/16	11-1/8	5/8	5/8	2-3/4	3-1/2	6	3/8	998.9	.5781	1098.8	.6359	11	15.35	99.0	6

Standard Bolt Holes Drilled on the WL (Water Level) Line ± 1/4"

- ① Tapco recommends using WL (water level) fill + 10% for usable capacity. A gross capacity figure is no longer provided as it is inappropriate for rating an agricultural elevator bucket.
- ② Holes Drilled 1/32" Oversize

**NOTE ON DESIGN:** Over 35 years ago, Tapco Inc. introduced the first "Heavy Duty" nonmetallic elevator bucket to the agricultural industry. This bucket, manufactured in the highly proven "CC" style, soon became the standard of the industry. Now, as design engineers, manufacturers, and elevator operators demand more from their legs in both throughput and extended life, Tapco is proud to introduce its new line of "CC-XD" Xtreme Duty elevator buckets. These buckets, molded in the same "CC" style, industry proven since 1938, offer benefits not found in other brands. This allows the designer, manufacturer or operator to directly interchange existing "CC-HD" buckets with the new "CC-XD" and maintain the same precise operating parameters that are expected from a correctly engineered bucket.