


HIGH DENSITY POLYETHYLENE ELEVATOR BUCKETS

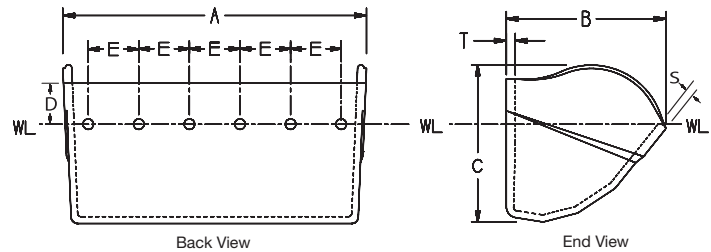

STYLE CC-XD "SUPER CAPACITY" BUCKETS

SIZE Inches (Millimeters) (Nominal)	Dimension-Actual (Inches) Tolerance A, B, C ± 1/8" T ± 1/64"					Drilling-Standard (Inches) ② Tolerance D ± 1/4"				Capacity ① Tolerance ± 3%				Spacing on Belt Inches (Minimum)	Weight (Pounds)		
	Length A	Proj. B	Depth C	Thick-ness T	Thick-ness S	From Top D	Center to Center E	No. of Holes	Bolt Dia.	WL		WL + 10%			Each (Average)	Per Carton (Average)	Number Per Carton
										Cu. In.	Cu. Ft.	Cu. In.	Cu. Ft.				
11 X 7 280-180	11-11/16	7-15/16	7-7/8	3/8	1/2	2	3-3/8	4	5/16	253.5	.1467	281.7	.1630	8	3.46	31.0	8
12 X 7 300-180	12-11/16	7-15/16	7-7/8	3/8	1/2	2	3-3/8	4	5/16	277.8	.1607	305.6	.1769	8	3.82	35.0	8
13 X 7 330-180	13-11/16	7-15/16	7-7/8	3/8	1/2	2	3-5/8	4	5/16	302.0	.1747	332.2	.1442	8	4.04	36.0	8
14 X 7 350-180	14-11/16	7-15/16	7-7/8	3/8	1/2	2	3	5	5/16	326.4	.1889	359.0	.2076	8	4.22	38.0	8
15 X 7 370-180	15-11/16	7-15/16	7-7/8	3/8	1/2	2	3-1/4	5	5/16	350.7	.2030	372.6	.2156	8	4.46	40.0	8
16 X 7 400-180	16-11/16	7-15/16	7-7/8	3/8	1/2	2	2-7/8	6	5/16	374.9	.2170	386.2	.2235	8	4.69	42.0	8
12 X 8 300-215	12-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	3-3/8	4	5/16	362.0	.2095	398.2	.2304	9	4.85	43.0	8
14 X 8 350-215	14-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	3	5	5/16	429.6	.2486	472.6	.2775	9	5.26	46.0	8
16 X 8 400-215	16-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	2-7/8	6	5/16	511.1	.2958	562.2	.3254	9	5.75	50.0	8
18 X 8 450-215	18-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	3-1/8	6	5/16	564.4	.3266	620.8	.3593	9	6.59	57.0	8
20 X 8 500-215	20-11/16	9-1/16	8-7/8	1/2	1/2	2-1/4	3-1/2	6	5/16	644.2	.3728	708.6	.4101	9	7.17	64.0	8
20 X 10 500-260	20-11/16	11-5/16	11-1/8	5/8	5/8	2-3/4	3-1/2	6	3/8	960.5	.5558	1056.6	.6115	11	11.56	77.0	6

Standard Bolt Holes Drilled on the WL (Water Level) Line ± 1/4"

- ① Tapco recommends using WL (water level) fill + 10% for usable capacity. A gross capacity figure is no longer provided as it is inappropriate for rating an agricultural elevator bucket.
- ② Holes Drilled 1/32" Oversize

NOTE ON DESIGN: Over 35 years ago, Tapco Inc. introduced the first "Heavy Duty" nonmetallic elevator bucket to the agricultural industry. This bucket, manufactured in the highly proven "CC" style, soon became the standard of the industry. Now, as design engineers, manufacturers, and elevator operators demand more from their legs in both throughput and extended life, Tapco is proud to introduce its new line of "CC-XD" Xtreme Duty elevator buckets. These buckets, molded in the same "CC" style, industry proven since 1938, offer benefits not found in other brands. This allows the designer, manufacturer or operator to directly interchange existing "CC-HD" buckets with the new "CC-XD" and maintain the same precise operating parameters that are expected from a correctly engineered bucket.