SUPER TOUGH **NYLON** ELEVATOR BUCKETS

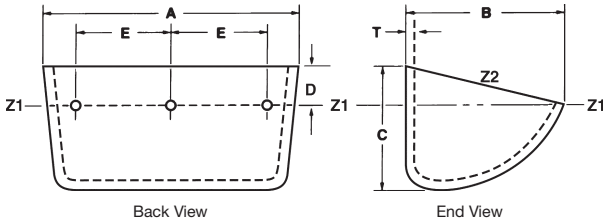

STYLE SUPER EUROBUCKET

SIZE (Millimeters) Inches Nominal	Dimension-Actual (mm) Inches Tolerance A, B, C ± (3.0mm) G, T ± (0.4mm) Tolerance A, B, C ± 1/8" G, T ± 1/64"				Hole Drilling-Standard (mm) Inches					Capacity (Liters) Cubic Inches Tolerance ± 3%		Spacing (Buckets / Meter ▪) Inches Between Buckets	Weight (Kg) Pounds		
	Length A	Proj. B	Depth C	Thickness T	Center to Center E	No. of Holes	Bolt Dia.	Hole Dia.	Distance Down D	Z2	Z1		Each (Average)	Per Carton (Average)	Number Per Carton
(100-90) **4 X 3-1/2**	(111) 4-3/8	(96) 3-3/4	(72) 2-7/8	(5.5) 7/32	(50) 2	2	(8) 5/16	(9.0) 11/32	(23) 7/8	(.38) 22.9	(.27) 16.5	(14.0) 3	(0.13) 0.29	(3.0) 6.6	20
(130-120) **5 X 4-1/2**	(143) 5-5/8	(127) 5	(95) 3-3/4	(5.5) 7/32	(70) 2-3/4	2	(8) 5/16	(9.0) 11/32	(28) 1-1/8	(.89) 54	(.65) 39.9	(10.5) 4	(0.25) 0.55	(5.5) 12.1	20
(140-120) **5-1/2 X 5**	(152) 6	(127) 5	(95) 3-3/4	(6.5) 1/4	(70) 2-3/4	2	(8) 5/16	(9.0) 11/32	(28) 1-1/8	(.96) 58.3	(.71) 43.2	(10.5) 4	(0.27) 0.59	(5.8) 12.7	20
(180-140) **7 X 5-1/2**	(194) 7-5/8	(157) 6-3/16	(118) 4-5/8	(6.5) 5/16	(100) 3-15/16	2	(8) 5/16	(9.0) 11/32	(33) 1-5/16	(1.90) 116.2	(1.42) 86.9	(8.6) 5	(0.50) 1.10	(10.9) 24.1	20
(200-140) **8 X 5-1/2**	(214) 8-7/16	(157) 6-3/16	(118) 4-5/8	(7.7) 5/16	(100) 3-15/16	2	(8) 5/16	(9.0) 11/32	(33) 1-5/16	(2.12) 1295	(1.59) 97.1	(8.6) 5	(0.51) 1.12	(11.4) 25.2	20
(230-160) **9 X 6-1/2**	(246) 9-11/16	(168) 6-5/8	(126) 4-15/16	(7.7) 5/16	(120) 4-3/4	2	(10) *3/8	(11.0) 13/32	(35) 1-3/8	(2.82) 172.0	(2.11) 128.9	(8.0) 5	(0.71) 1.56	(14.6) 32.3	20
(280-165) **11 X 6-1/2**	(295) 11-5/8	(172) 6-3/4	(135) 5-5/16	(7.7) 5/16	(80) 3-3/16	3	(10) *3/8	(11.0) 13/32	(40) 1-5/8	(3.86) 235.5	(2.95) 180.2	(7.4) 6	(0.86) 1.89	(18.4) 40.5	20
(300-180) **12 X 7**	(316) 12-7/16	(192) 7-9/16	(144) 5-5/8	(7.7) 5/16	(100) 3-15/16	3	(10) *3/8	(11.0) 13/32	(40) 1-5/8	(4.83) 295.0	(3.63) 221.5	(7.1) 6	(1.13) 2.49	(27.6) 52.1	20
(330-215) **13 X 8-1/2**	(346) 13-5/8	(233) 9-3/16	(175) 6-7/8	(9.5) 3/8	(120) 4-3/4	3	(10) 3/8	(11.0) 13/32	(54) 2-1/8	(7.79) 475.3	(5.84) 356.6	(5.7) 7	(1.79) 3.95	(28.9) 63.3	15
(370-215) **14-1/2X8-1/2**	(387) 15-1/4	(233) 9-3/16	(175) 6-7/8	(9.5) 3/8	(90) 3-9/16	4	(10) 3/8	(11.0) 13/32	(54) 2-1/8	(8.79) 536.2	(6.60) 403.0	(5.7) 7	(1.96) 4.32	(31.8) 70.0	15

Standard Bolt Holes Drilled on the Z1 (Water Level) Line ± (6.0 mm) ± 1/4"

Super EuroBuckets are designed to replace Super Starco, Jet and other European manufactured elevator buckets. For sizes not shown, we suggest using one of the CC-HD low profile buckets to meet your needs.

***IMPORTANT:** Buckets can be drilled for 8 mm or 10 mm bolts, please specify. 10 mm is standard.

▪ Spacing at which the maximum number of buckets per meter will physically fit the belt. This does not mean the buckets will fit and discharge perfectly at this spacing under all circumstances. Contact your bucket elevator manufacturer for spacing recommendations.